

HEAVY DUTY ELECTRIC RANGES, 12" WIDE FULL BODY EXPANDO RANGES



VEX3 (HOT PLATES)

SPECIFICATIONS:

☐ **VEX2 (HOT TOP):**

1 - 12" x 24" (305 mm x 610 mm) 5 KW cast hot top thermostatically controlled. Temperatures range from 340° to 800°F (171° to 427°C). Provided with clean out grooves at left and right edges of range top. Hot top not suitable for griddle work. (Available in single phase only.)

☐ **VEX3 (HOT PLATES):**

2 - 9½" (241 mm) diameter, infinite heat controlled 2 KW round cast* surface units supported in top sections of porcelain enameled steel. Optional high speed round tubular surface units are available for use only with 208 or 240 volts. High speed round tubular surface units are not recommended for stock pot work. Total 4 KW input for range top.

*The 9½" round cast surface units are identified as E.G.O. energy saving units. A separate thermostat is built into each unit. It is set at 820° to 850°F. When a unit dial is set at the top range of the infinite heat switch, and a pan or pot containing food is placed on the unit, the unit delivers 2,000 watts at a temperature lower than 800°F. When the cooking utensil is removed or boils dry, heat is no longer carried from the unit and the temperature rises. When the unit reaches from 820° to 850°F the wattage is cut back to 950 watts, a 52.5% reduction.

- ☐ **VEX2** Hot Tops
- ☐ **VEX3** French Hot Plates

STANDARD FEATURES

- Stainless steel front, painted sides.
- Stainless steel front and back top ledges.
- 5" stainless steel vented back splash.
- Fully enclosed 31"h body with removable front panel.
- 6" stainless steel adjustable legs.
- Tops supported by stainless steel front and back top ledges, each with integral grease gutter and drain chute.
- Double baffled porcelain enamel steel grease drawer under cook top.
- One year limited parts and labor warranty.

OPTIONS AT EXTRA COST


- ☐ High speed round tubular surface units for 208 or 240 volts (VEX3 only) base.
- ☐ Without legs (for masonry base mounting).
- ☐ High shelf.
- ☐ Stainless steel side (specify side _____).
- ☐ Stainless steel both sides.
- ☐ Stainless steel top support for round surface units (VEX3 only).
- ☐ 480 volts, 60 Hz, 1 ph (overload protection not included).
- ☐ 480 volts, 60 Hz, 3 ph (overload protection not included).
- ☐ Second year extended limited parts and labor warranty.




HEAVY DUTY ELECTRIC RANGES, 12" WIDE FULL BODY EXPANDO RANGES

FULL BODY EXPANDO RANGE POWER SUPPLY:


- ☐ 208 volts, 60 Hz, 1 ph with magnetic circuit breakers.
- ☐ 208 volts, 60 Hz, 3 ph with magnetic circuit breakers.
- ☐ 240 volts, 60 Hz, 1 ph with magnetic circuit breakers.
- ☐ 240 volts, 60 Hz, 3 ph with magnetic circuit breakers.
- ☐ 480 volts, 60 Hz, 1 ph (overload protection not included).
- ☐ 480 volts, 60 Hz, 3 ph (overload protection not included).

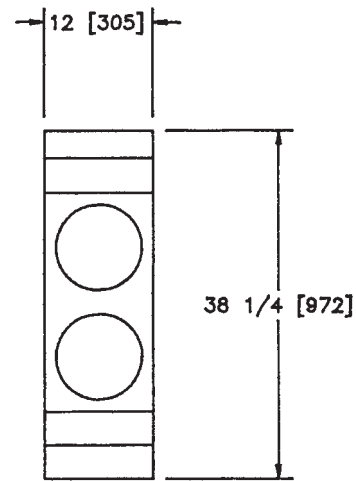

VEX-3

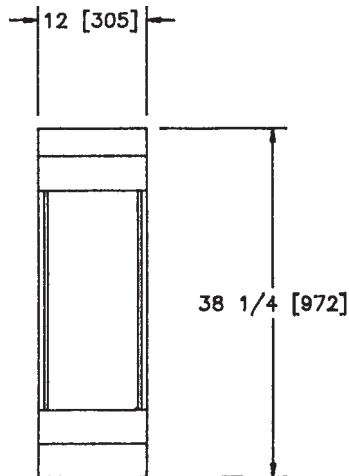

VEX-2

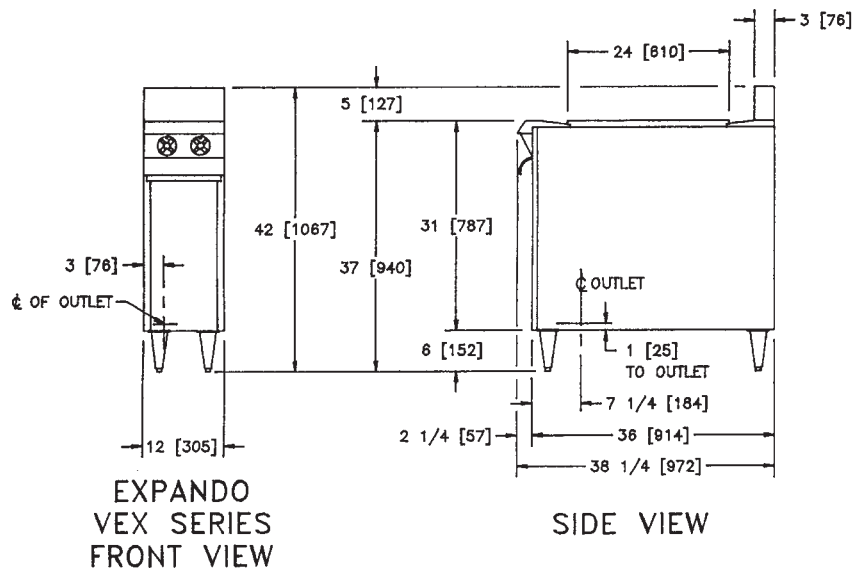

EXPANDO
VEX SERIES
FRONT VIEW

SIDE VIEW

VEX
208/240 VOLT

UNIT	TOTAL KW CONN.	LOAD KW PER PHASE							
		3-PHASE							
		L1-L2			L2-L3		L1-L3		
VEX2	5	—			—		—		
VEX3	4	2.0			2.0		—		
	NORMAL AMPS PER LINE								
	3-PHASE						1-PHASE		
	208V			240V			208V	240V	
	L2	L2	L3	L1	L2	L3	L1-L2	L1-L2	
VEX2	—	—	—	—	—	—	24	21	
VEX3	8	17	8	7	14	7	19	17	

VEX
480 VOLT

UNIT	TOTAL KW CONN.	LOAD KW PER PHASE			
		3-PHASE			
		X-Y		Z	Y-Z
VEX2	5	—		—	—
VEX3	4	2.0		2.0	—
		NORMAL AMPS PER LINE			
		3-PHASE			1-PHASE
		480V			480V
		X	Y	X	X-Z
VEX2	—	—	—	—	10.4
VEX3	3.6	7.2	3.6	8.3	

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

**VULCAN-HART COMPANY, P.O. BOX 696, LOUISVILLE, KY 40201, TEL. 1-800-814-2028
502-778-2791 QUOTE & ORDER FAX: 1-800-444-0602**